



**Submittal Data Sheet**

**DVH24SG-1**

Project Name:		Approval:	
Location:		Date:	
Engineer:		Construction:	
Submitted to:		Unit #:	
Submitted by:		Drawing #:	
Reference:			

Indoor unit model	B-DVH24SG-1
Outdoor unit model	A-DVH24SG-1



**PERFORMANCE DATA**

Power supply	Ph-V-Hz	208-230V, 1Ph, 60Hz
--------------	---------	---------------------

<b>Cooling</b>		
Capacity	Btu/h	24000
Input	W	2500
Rated current	A	11.0
EER	Btu/w	9.5
SEER	Btu/w	17.0

<b>Heating at 47</b>		
Capacity	Btu/h	24000
Input	W	2200
Rated current	A	9.6
COP	W/W	3.2
HSPF4		9.5
HSPF5		8.0

<b>Electrical</b>		
MINIMUM CIRCUIT AMPACITY	A	20.0
MAX. FUSE	A	25.0
Connection wiring		16*4 AWG

<b>Compressor</b>		
Model		KTM240D57UMT
Type		Rotary
Brand		GMCC
Capacity	Btu/h	26323.58
Input	W	2085
Rated current(RLA)	A	9.45
Locked rotor Amp(LRA)	A	-
Thermal protector		-
Thermal protector position		-
Refrigerant oil/oil charge	ml	VG74/670

<b>SYSTEM DATA</b>		
Design pressure	PSIG	550/340
Refrigerant type	oz	R410A/62.79
Refrigerant precharge	ft	25
Additional charge per ft.	oz	0.322
Liquid side/Gas side	mm(in)	Φ9.52/Φ15.9(3/8"/5/8")
Max. refrigerant pipe length	ft	98
Max. difference in level	ft.	66

**INDOOR UNIT DATA**

<b>Indoor fan motor</b>		
Model		B-DVH24SG-1
Brand		Weiling
Input		64
	A	0.206
RLA	A	-
Winding Resistance	Ω	-
Capacitor	uF	-
Speed(Hi/Mi/Lo)	r/min	1100/900/750

<b>Air flow &amp; Noise level</b>		
Indoor air flow (Hi/Lo)	CFM	706/588/450
Indoor noise level (Hi/Lo)	dB(A)	48/42.5/34

<b>Indoor unit</b>		
Dimension(W*D*H)	inch	42.52x8.90x13.19
Packing (W*D*H)	inch	45.47x16.34x12.40
Net/Gross weight	lbs.	30.2/39.68

**OUTDOOR UNIT DATA**


<b>Outdoor fan motor</b>		
Model		A-DVH24SG-1
Brand		Weiling
Input		50
RLA	A	0.5
LRA	A	-
Winding Resistance	Ω	37.3
Capacitor	uF	-
Speed	r/min	800/750/650

<b>Air flow &amp; Noise level</b>		
Outdoor air flow	CFM	1823
Outdoor noise level	dB(A)	58

<b>Outdoor unit</b>		
Dimension(W*D*H)	inch	33.27x14.29x27.64
Packing(W*D*H)	inch	37.99x15.55x30.12
Net/Gross weight	lbs.	105.16/112.22


<b>Operation temperature</b>		
Indoor(cooling/heating)	Deg. F	62~90/32~86
Outdoor(cooling/heating)	Deg. F	5~122/5~86
Application area	sq.ft	330-484

**INDOOR UNIT**

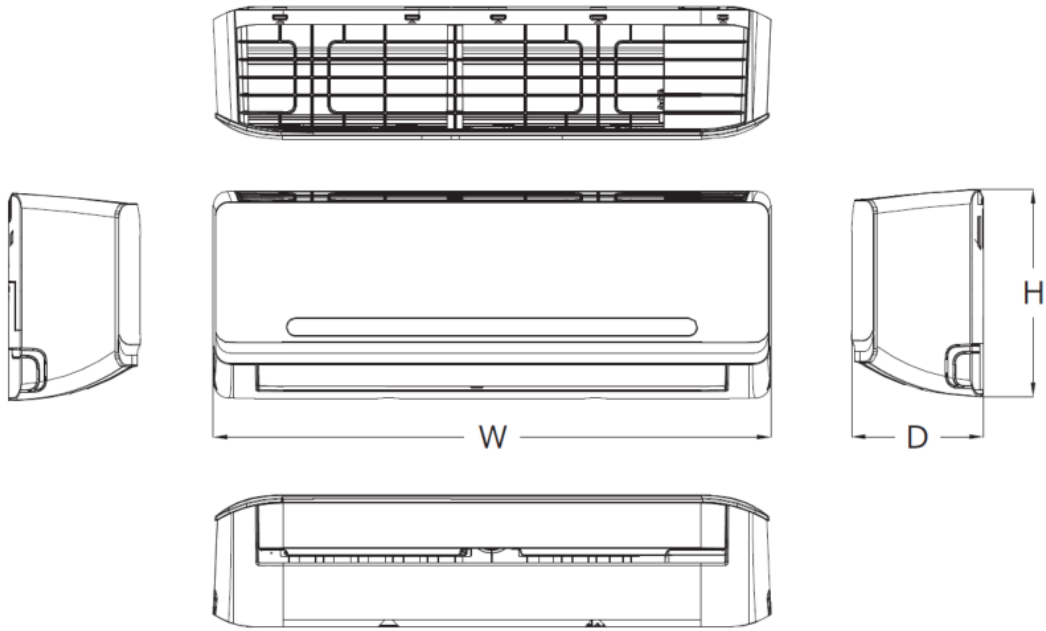

Model	W (inch)	D (inch)	(inch)				
B-DVH24SG-1	42.52	8.90	3.19				

**OUTDOOR UNIT**

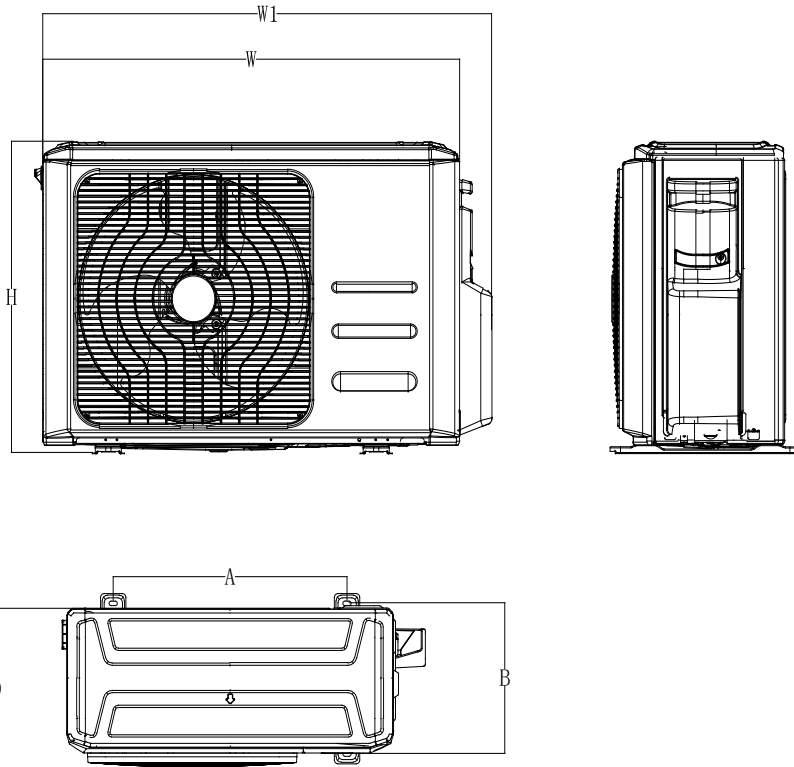

Model	W (inch)	D (inch)	(inch)				W1 (inch)	A (inch)	B (inch)
A-DVH24SG-1	33.27	14.29	7.64				35.98	21.26	13.78